




06 Downlights Fixed LED>The 3-12W Round Recessed Panels Die cast

10112F/W/EW

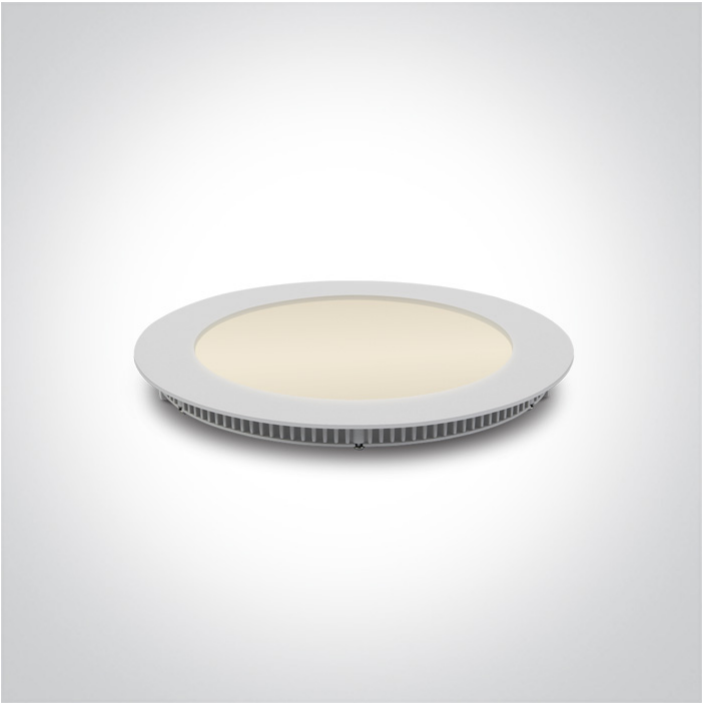

12W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 500mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

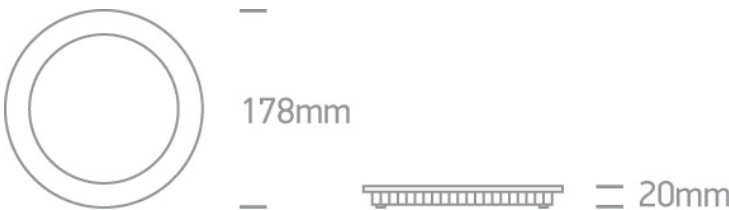

Gallery






Physical Specification

Item Group	06 Downlights Fixed LED
Family	The 3-12W Round Recessed Panels Die cast
Order Code	10112F/W/EW
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular

Height	20mm
Diameter	178mm
Cutout Hole Diameter	165mm
Recessed Ceiling	Yes
Depth Required	40mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	18V
Safety Class	
Power(Watts)	9W
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 2835

LED Brand
LED Number

Chimei
108

Gear


Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
500mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Brand

Led Driver
100-240V
Yes
Yes
8,5-10,5W
0,92
Yes
11-18V
IP20

No
40°C
85°C
Plastic
One Light

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

2700K
745lm
62,08lm/W
80
120°


Packing Info

Box Length
------------

22cm
------

Box Width	18,5cm
Box Height	3cm
Box Weight	0,71Kg
Pcs/Carton	20
Barcode	5291889038986
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Average Lifetime	30000 hours
Weee Directive	Yes

switch to  
**one light!**

